

Laser Distance Sensor

Triangulation


P3PC311 LASER

Part Number



- Analog output: 4...20 mA
- Integrated jump detection
- Intuitive operating concept
- Measured value independent of material, color and brightness
- Rugged aluminium housing

These laser distance sensors work with a fine red light beam and a high-resolution CMOS line. They determine the distance between the sensor and the object by means of the triangulation principle. Thanks to the integrated TripleA technology, the sensors offer high precision, temperature stability and material independence. This means they deliver accurate results even with objects of different materials, colors and shapes, as well as in fluctuating light and temperature conditions. Settings are entered via the easy-to-read OLED display or via Bluetooth using the weCon app.

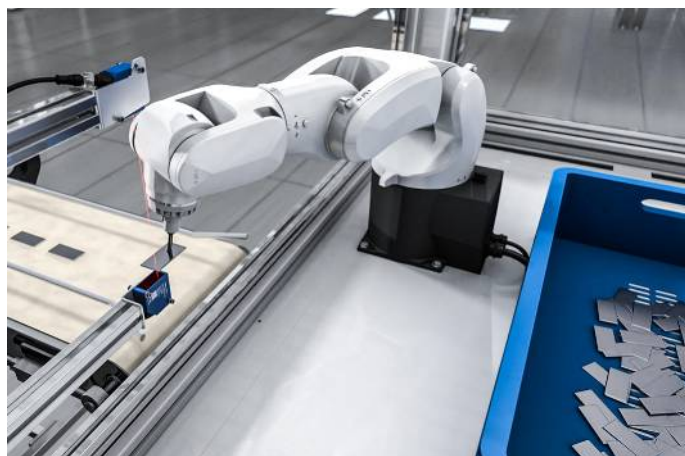

Technical Data

Optical Data

Working Range	60...660 mm
Setting Range	60...660 mm
Reproducibility maximum	550 µm
Reproducibility: 1 Sigma	30 µm
Linearity Deviation	900 µm
Light Source	Laser (red)
Wavelength	655 nm
Service Life (T = +25 °C)	100000 h
Laser Class (EN 60825-1)	1
Max. Ambient Light	20000 Lux
Light Spot Diameter	see Table 1

Electrical Data

Supply Voltage	18...30 V DC
Current Consumption (U _b = 24 V)	< 60 mA
Measuring Rate	2500 /s
Response Time	< 0,5 ms
Temperature Drift	< 50 µm/K
Temperature Range	-30...60 °C
Analog Output	4...20 mA
Short Circuit and Overload Protection	yes
Reverse Polarity Protection	yes
Interface	IO-Link V1.1
Baud Rate	COM3
Protection Class	III

Mechanical Data

Setting Method	(OLED)/Bluetooth menu
Housing Material	Aluminum
Degree of Protection	IP67
Connection	M12 × 1; 4/5-pin
Optic Cover	PMMA

Error Output

IO-Link

Connection Diagram No.

Control Panel No.

Suitable Connection Equipment No.

Suitable Mounting Technology No.

242

X6


2 | 35

380

Complementary Products

IO-Link Master


Software

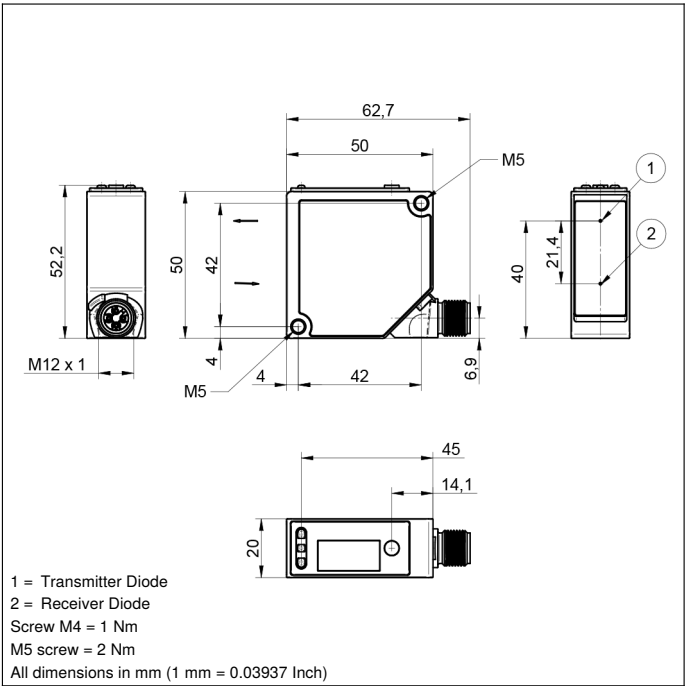


1 = Transmitter Diode
2 = Receiver Diode
Screw M4 = 1 Nm
M5 screw = 2 Nm
All dimensions in mm (1 mm = 0.03937 Inch)

Ctrl. Panel

X6



06 = Teach Button
5a = Switching Status Display, O1
68 = supply voltage indicator
7c = Analog output O display

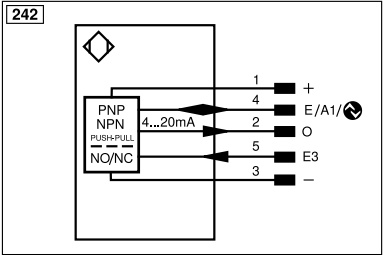

Legend					
+	Supply Voltage +	nc	Not connected	ENBRS422	Encoder B/B (TTL)
-	Supply Voltage 0 V	U	Test Input	ENA	Encoder A
~	Supply Voltage (AC Voltage)	Ü	Test Input inverted	ENb	Encoder B
A	Switching Output (NO)	W	Trigger Input	AMIN	Digital output MIN
Ä	Switching Output (NC)	W-	Ground for the Trigger Input	AMAX	Digital output MAX
V	Contamination/Error Output (NO)	O	Analog Output	AOK	Digital output OK
Ȳ	Contamination/Error Output (NC)	O-	Ground for the Analog Output	SY In	Synchronization In
E	Input (analog or digital)	BZ	Block Discharge	SY OUT	Synchronization OUT
T	Teach Input	Amv	Valve Output	OLT	Brightness output
Z	Time Delay (activation)	a	Valve Control Output +	M	Maintenance
S	Shielding	b	Valve Control Output 0 V	rsv	Reserved
RxD	Interface Receive Path	SY	Synchronization	Wire Colors according to DIN IEC 60757	
TxD	Interface Send Path	SY-	Ground for the Synchronization	BK	Black
RDY	Ready	E+	Receiver-Line	BN	Brown
GND	Ground	S+	Emitter-Line	RD	Red
CL	Clock	±	Grounding	OG	Orange
E/A	Output/Input programmable	SnR	Switching Distance Reduction	YE	Yellow
IO-Link	IO-Link	Rx+/-	Ethernet Receive Path	GN	Green
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path	BU	Blue
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet
OSSD	Safety Output	La	Emitted Light disengageable	GY	Grey
Signal	Signal Output	Mag	Magnet activation	WH	White
BL_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation	PK	Pink
ENo RS422	Encoder 0-pulse 0/Ü (TTL)	EDM	Contact Monitoring	GNYE	Green/Yellow
PT	Platinum measuring resistor	ENARIS422	Encoder A/A (TTL)		

Table 1

Working Distance	60 mm	360 mm	660 mm
Light Spot Diameter	1,5 mm	1 mm	0,5 mm

