
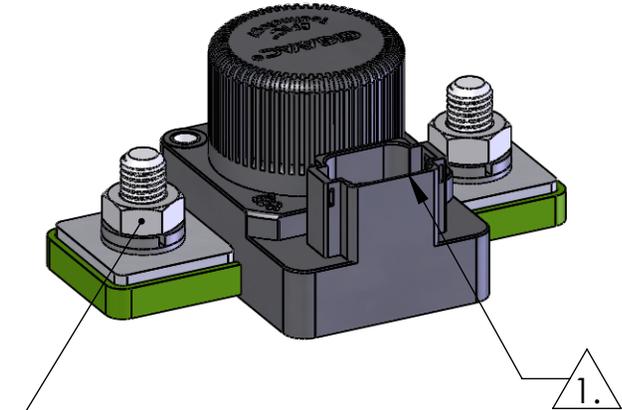



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF GIGAVAC LLC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF GIGAVAC LLC IS PROHIBITED.

REV	DESCRIPTION	DATE	APPROVED
1	ENGINEERING RELEASE	11/26/2013	R.ULRICH

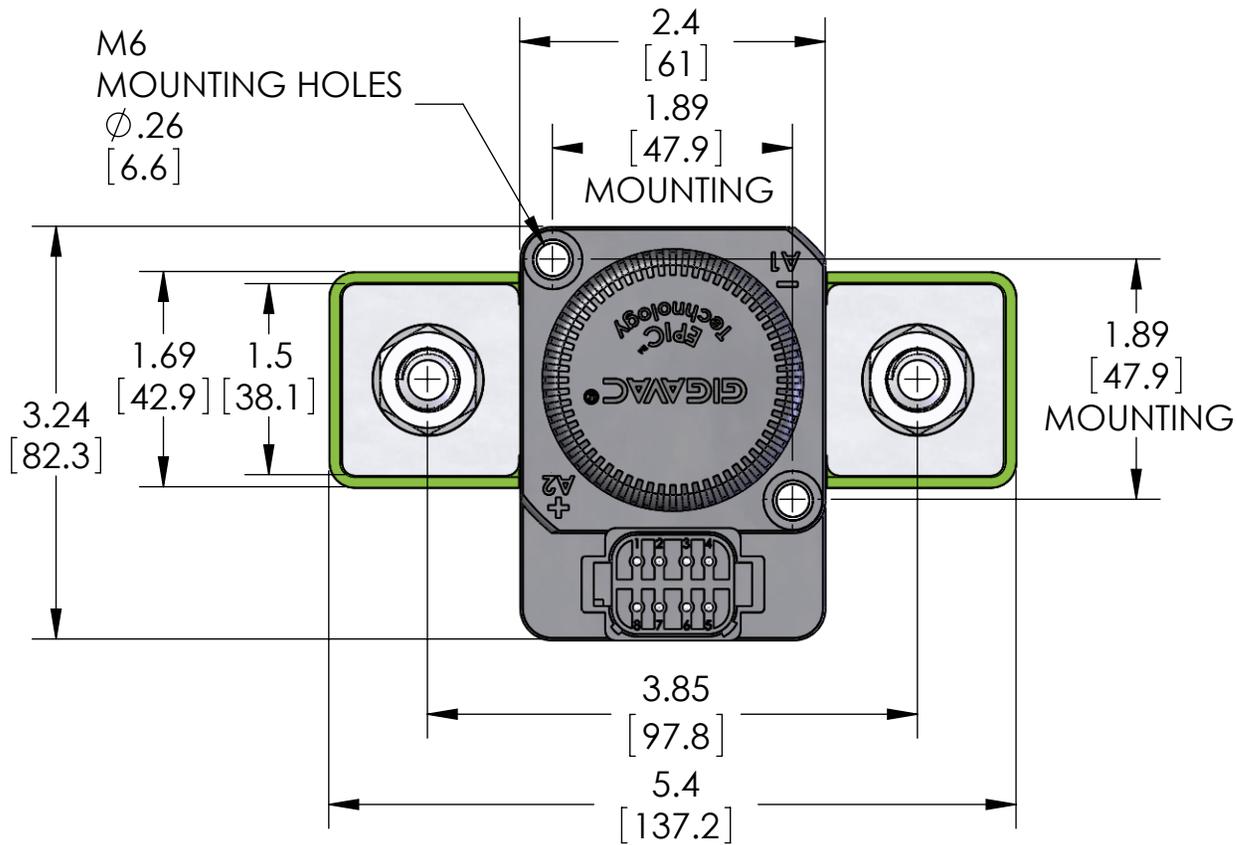

POWER CONNECTION
 ZINC PLATED, M12X1.75 BOLT
 STAINLESS M12X1.75 NUT
 STAINLESS LOCK WASHER
 STAINLESS FLAT WASHER

TORQUE 200-300 IN-LB (22-33 Nm)

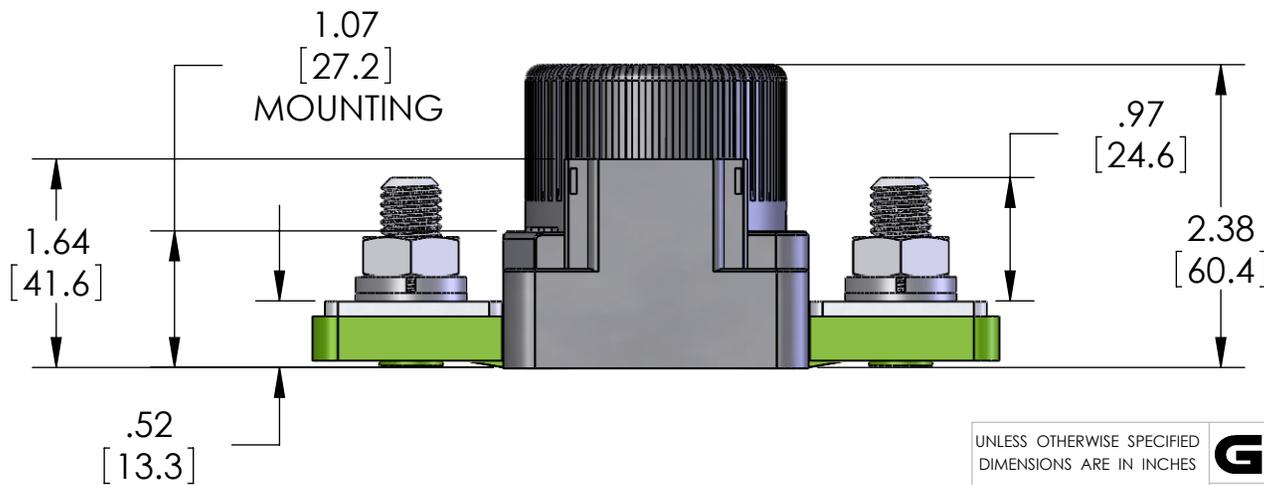

CASE MATERIAL
 DUPONT ZYTEL FR50

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES

GIGAVACTM

6382 ROSE LANE,
 CARPINTERIA, CA 93013
 www.gigavac.com




DATA SHEET: **MXL15 CONTACTOR**

SIZE: A	DWG. NO. MXL15	REV: 1
SCALE: N/A	CAD FILE: MXL15_DATASHEET.SLDDRW	SHEET 1 OF 2

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF GIGAVAC LLC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF GIGAVAC LLC IS PROHIBITED.

Environmental Specifications	
Temperature Range	-55°C to +85°C
Weight (Typical, with hardware)	1.6 lbs, 0.72 kg
Seal	Hermetic Vacuum Braze, tested to E-9 std cc/sec
Vibration	50-2000 Hz 15G
Shock	½ Sine @20Gs, 11ms
Steam/Water-Jet/Boiling water	Withstands Water-Jet over 2750psi, Steam over 105 psi
Chemical, Corrosion, Fungal	Resistant to corrosion, chemicals, and fungal growth.
Electrical Specifications	
Insulation resistance (min)	100MΩ (50MΩ after life)
Dielectric withstanding voltage	2200Vrms
Voltage drop across contacts @ 500A	150mV (max)
Continuous Current Rating	
	Cable 400MCM 500A @85C, 85C MAX TEMPERATURE RISE
Max Current Rating	
	1 sec 3000A
	60 sec 1500A
	300 sec 850A
Set (Close) Time	
	Max 20ms
	Typical 13ms
Reset (Open) Time, Max	12ms
Resistive Load Switching	
500A @ 12/24/28 VDC	100,000 cycles
Fault interrupt @28 VDC	2000A (max)
Mechanical Life	1,000,000 cycles

Coil Data		
	12 VDC	24/28 VDC
COIL PART NUMBER	B	C
Nominal Voltage	12 VDC	24/28 VDC
Maximum Voltage	16 VDC	33 VDC
Set Voltage @23C (max)	9 VDC	13 VDC
Reset Voltage @23C (min)	7 VDC	10VDC
Coil Current	2.6 A (@12V)	1.6 A (@28V)
Pickup/Dropout Impulse Time (Internal Set)	100ms Max	

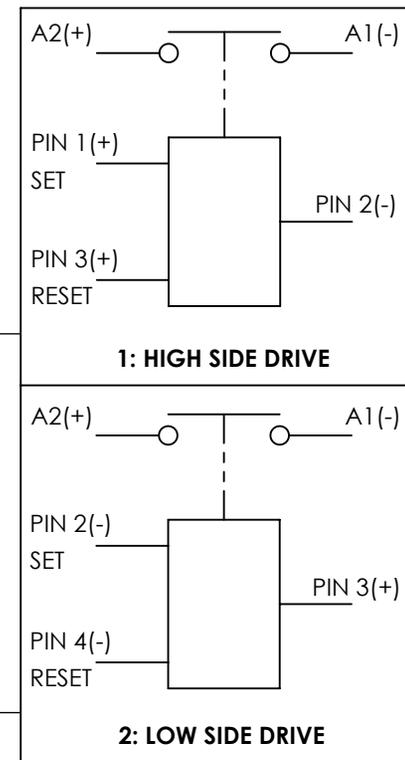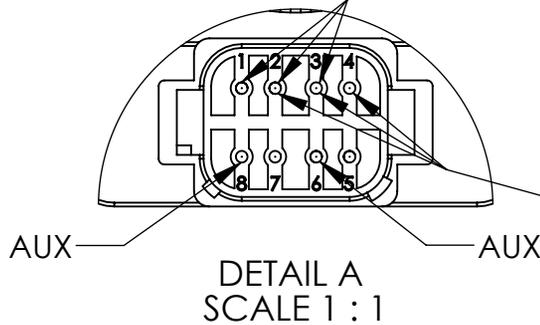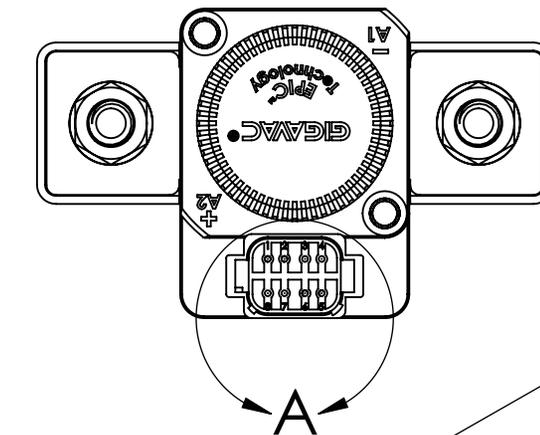

MXL15 _ _ E _

COIL VOLTAGE
B=12VDC
C=24/28VDC

HIGH/LOW SIDE DRIVE
1=HIGH SIDE
2=LOW SIDE

AUXILIARY
B=SPST, NO
BLANK=NONE

GIGAVAC™
www.gigavac.com

6382 ROSE LANE,
CARPINTERIA, CA 93013
(805) 684-8401

DATA SHEET: MXL15 CONTACTOR

SHEET 2 OF 2

REV 1