


TKS-088c-TB38-MODUL

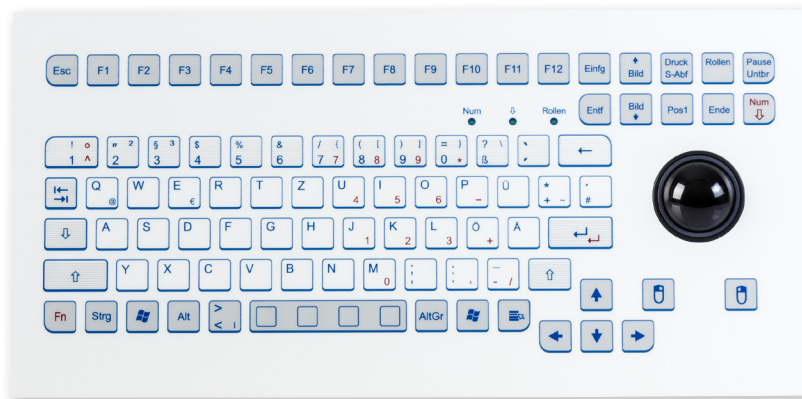

FEATURES

- Panel mount version with reserve side threaded bolts
- Excellent tactile feedback
- Haptic printing
- Integrated 38-mm trackball
- Chemical, abrasion and scratch resistant frontsheet
- Resistant against dirt, dust and liquids (IP65)

TECHNICAL DATA

Number of keys: 88
 Mounting type: front panel with threaded bolts
 Front panel material: aluminium
 Keyswitch technology: short travel keys
 Switching cycles: approx. 3 mill. (per key)
 Operating force: 2.6 N
 Switch travel: 0.3 mm
 Protection level: IP65 static, IP54 dynamic
 Interfaces: PS/2; USB
 USB compatibility: USB V1.1 compliance

Operating temperature: 0 °C to +70 °C
 Storage temperature: -25 °C to +80 °C
 Dimensions: 370 x 180 x 56 mm
 Weight: 1100 g

TECHNICAL DATA TRACKBALL


Ball diameter: 38 mm
 Ball material: phenolic resin
 Operating principle: mechanical

Cat.No.	Product description	Interface	Layout
KS18292	TKS-088c-TB38-MODUL-USB-DE	USB	German
KS18293	TKS-088c-TB38-MODUL-USB-US	USB	US
KS18290	TKS-088c-TB38-MODUL-PS/2-DE	PS/2	German
KS18291	TKS-088c-TB38-MODUL-PS/2-US	PS/2	US

Other language versions/interfaces/configurations available on request.

Subject to modifications and errors

TECHNICAL DRAWING (in mm)

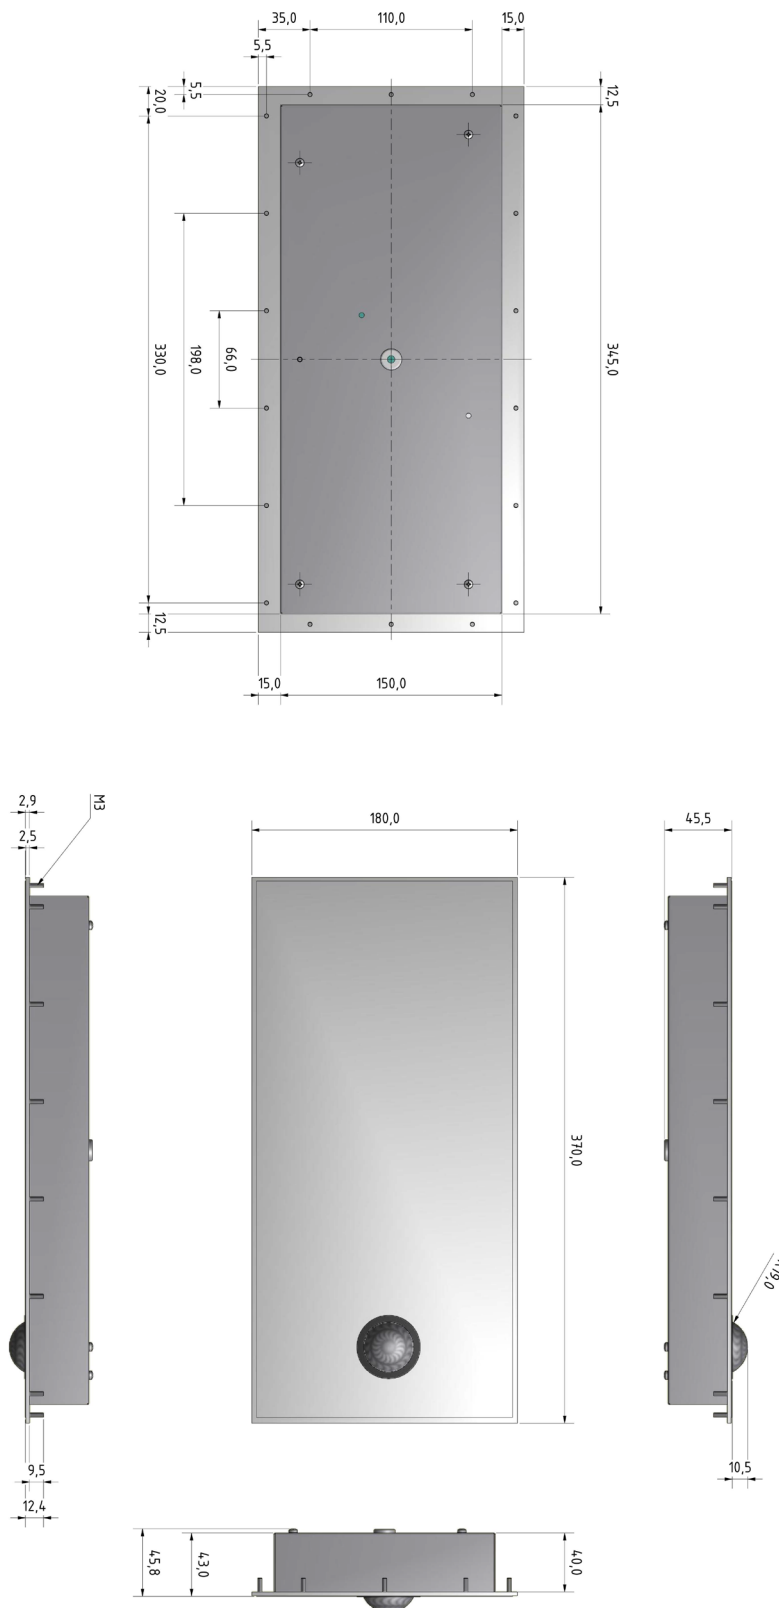

Subject to modifications and errors