


eBOX626-311-FL

Fanless Embedded System with Intel Atom® x5-E3940 1.8 GHz, HDMI, VGA, 2 GbE LAN, 6 USB, and 3 COM

Features

- Intel Atom® x5-E3940 onboard
- 204-pin DDR3L-1866 SO-DIMM for up to 8GB of memory
- Supports 2 GbE LAN, 3 COM, and 6 USB
- Supports one 2.5" SATA drive bay and mSATA
- Trusted Platform Module (TPM) 2.0
- 2 PCI Express Mini Card slots and 1 SIM slot
- -40°C to +60°C operating temperature range
- Hailo-8™ AI acceleration modules compatible*

* 0°C to +45°C operating temp. with Hailo-8™ AI acceleration module

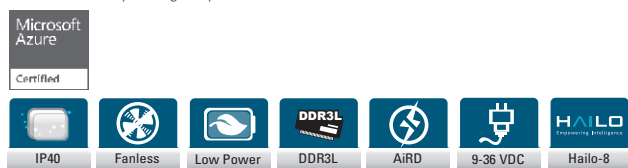

Specifications

Standard Color	Silver
Construction	Aluminum extrusion and heavy-duty steel, IP40
CPU	Intel Atom® Processor x5-E3940 1.8 GHz
System Memory	1 x 204-pin DDR3L-1866 SO-DIMM, up to 8GB
Chipset	SoC integrated
BIOS	AMI
System I/O Outlet	2 x RS-232/422/485 1 x RS-232 1 x HDMI (lockable) 1 x VGA 1 x Audio (Mic-in/Line-out) 2 x 10/100/1000 Mbps Ethernet (Intel® i211-AT) 4 x USB 3.0 2 x USB 2.0 4 x SMA-type antenna connector 1 x Phoenix type VDC power input connector 1 x AT/ATX switch 1 x ATX power switch
Watchdog Timer	65536 levels, 1 to 65535 sec.
Storage	1 x 2.5" SATA HDD drive bay (max. up 9.5 mm height) 1 x mSATA (enabled in BIOS setting)
Expansion Interface	2 x Full-size PCI Express Mini Card slot (USB + PCIe signal) 1 x SIM slot
TPM	TPM 2.0
System Indicator	1 x Green LED for system power-on 1 x Yellow LED for HDD/SSD active
Power Supply	9 to 36 VDC
Operating Temperature	-40°C to +60°C (-40°F to +140°F) (with W.T. SSD/DRAM for 9 to 36 VDC) (Default: Turbo mode)
Humidity	10% - 95%, non-condensing
Shock Vibration	IEC 60068-2-27 (with SSD: 50G, half sine, 11 ms duration)
Vibration Endurance	IEC 60068-2-64 (with SSD: 3Grms STD, random, 5 to 500 Hz, 1 hr/axis)
Dimensions	200 mm (7.87") (W) x 120 mm (4.72") (D) x 46 mm (1.81") (H)
Weight (net/gross)	1.2 kg (2.65 lb)/1.6 kg (3.53 lb)
Certifications	CE, FCC Class A
EOS Support	Win10 IoT, Linux
Software Support	AXView


* W.T.: Wide Temperature. All W.T. supported products have to be sorted by Axiomtek.

Packing List

- 1 x Screws pack
- 4 x Pre-installed foot pad
- 1 x DRAM thermal pad
- 1 x 2-pin terminal block connector
- 1 x HDD bracket

Updated Jul. 11, 2022.

* All specifications and photos are subject to change without notice.

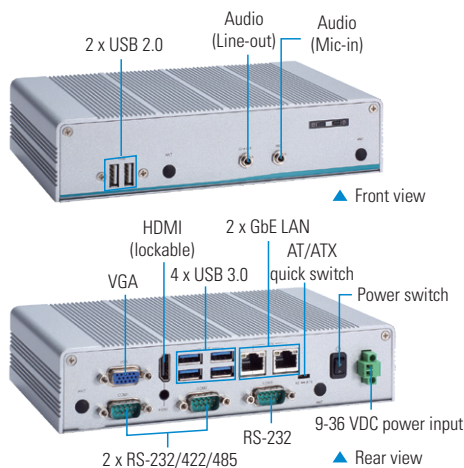

Power Protection

AC Version

- OVP (over voltage protection)
- UVP (under voltage protection)
- SCP (short current protection)

Ordering Information

Standard

eBOX626-311-FL (P/N: E36K626110)	Fanless embedded system with Intel Atom® x5-E3940 1.8 GHz, HDMI, VGA, 2 GbE LAN, 6 USB, and 3 COM (w/o 24V/120W adapter and power cord)
-------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------

Optional

2.5" SATA HDD	320GB or above
2.5" SATA SSD	128GB or above
DDR3L SO-DIMM	2GB to 8GB
mSATA	64MB or above
8816K6271AOE	Wall mount kit
886K62613AOE	VESA mount kit
886K62614AOE	DIN-rail kit
	3G/LTE module
50906D24000E	24V 120W power adapter
	Power cord
E9C3000008	Hailo VPU PCIe Mini Card AI module HMP1RB1C2GA

* Specifications and certifications may vary based on different requirements.

Dimensions

